

FIG 1

FIG. 2 is a schematic diagram of a system 100, according to one embodiment of the present invention. The system 100 includes a host device 110 and a client device 200. The host device 110 includes a processor 111, a memory 112, a network interface 113, and a display 114. The client device 200 includes a processor 201, a memory 202, a network interface 203, a display 204, and a camera 205. The host device 110 and the client device 200 are connected via a network 115.

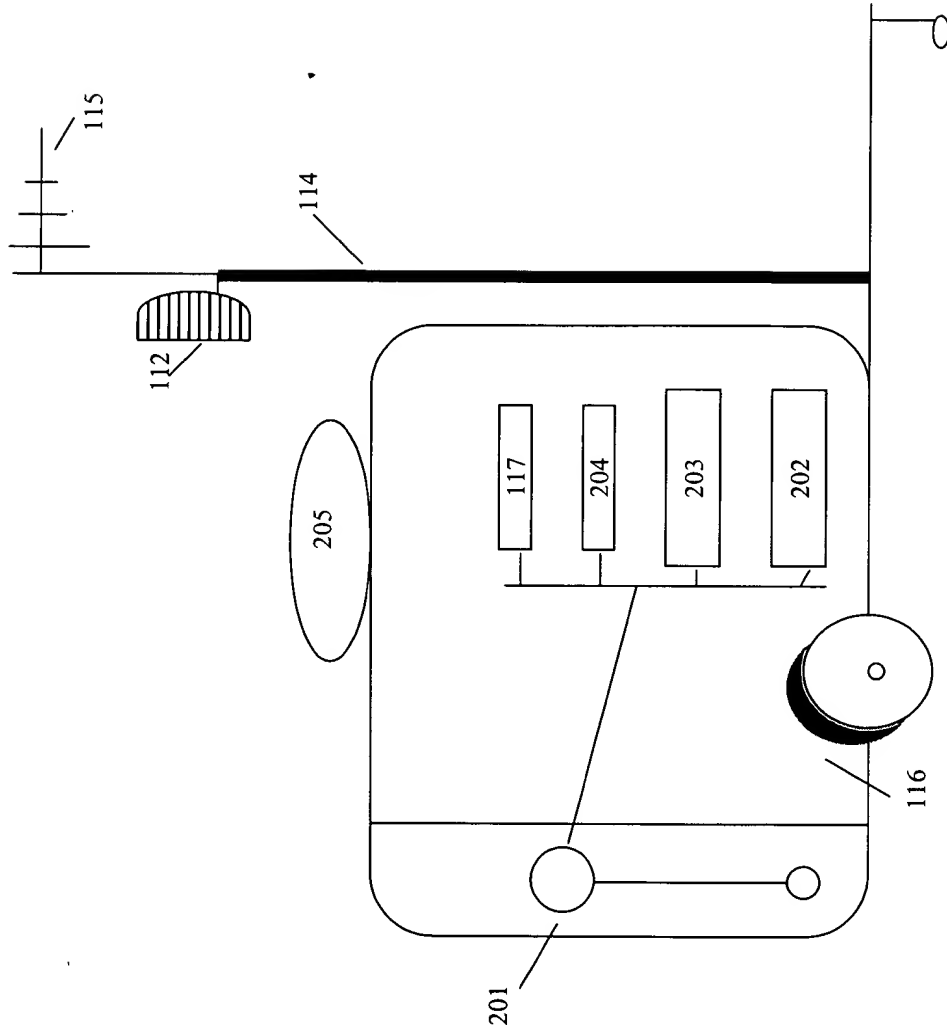


FIG 2